


degussa.

*creating essentials*

## PLEXIGLAS® RADIANT

Every Color of the Rainbow

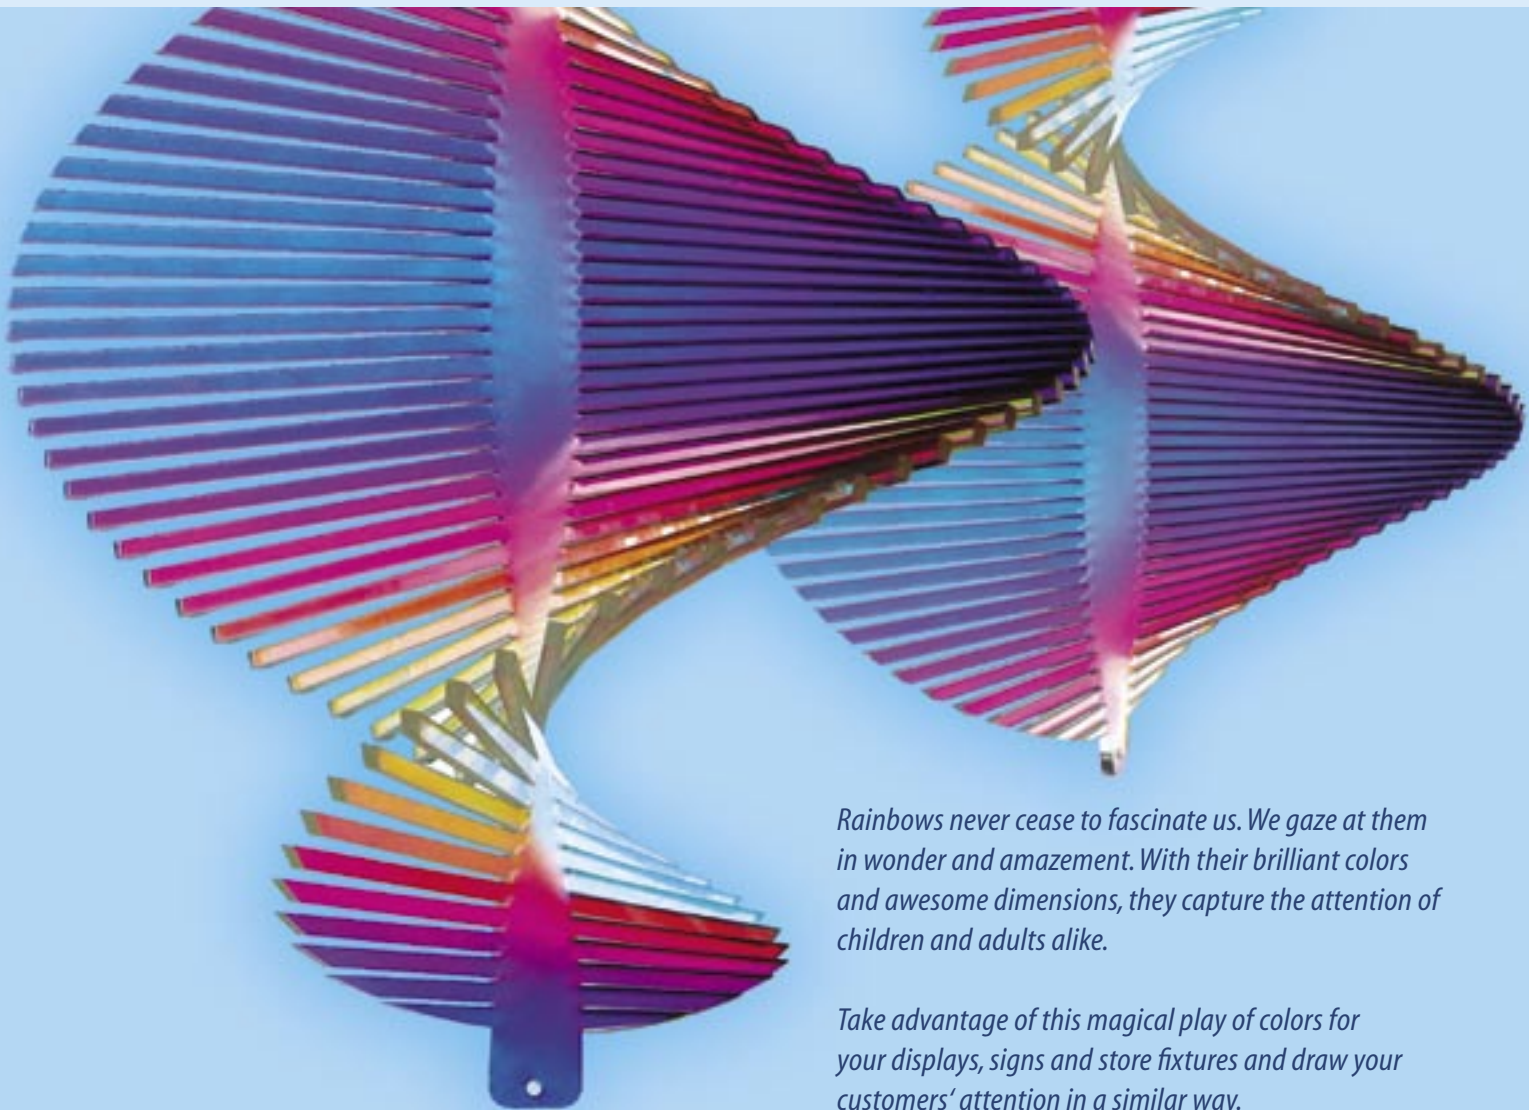

*Rainbows never cease to fascinate us. We gaze at them in wonder and amazement. With their brilliant colors and awesome dimensions, they capture the attention of children and adults alike.*

*Take advantage of this magical play of colors for your displays, signs and store fixtures and draw your customers' attention in a similar way.*

# PLEXIGLAS® RADIANT

- changes its color depending on the viewing angle
- uses ambient light to create its own lighting effects
- produces mirror-like reflections
- shines in every color of the rainbow
- is easy to saw, mill, drill, bend and polish
- can be thermoformed into almost every desired shape.

These properties make PLEXIGLAS® RADIANT the ideal material for designing eye-catching items, attention-grabbing displays, effective signs and dynamic, colorful tradeshow booths and store fixtures. It is a beautiful addition to the PLEXIGLAS® range and a real challenge for all designers and creative professionals.

PLEXIGLAS® RADIANT can be fabricated like any other standard grade of PLEXIGLAS®, bearing in mind a few special points.

## **Fabricating Recommendations**

### **Preliminary Remarks**

PLEXIGLAS® RADIANT acrylic sheets have a surface coating on one side that is responsible for the lighting effect. The following recommendations take this special feature of PLEXIGLAS® RADIANT into account during handling and fabrication.

PLEXIGLAS® RADIANT can be fabricated with the same parameters and equipment as standard acrylic sheets. Correct positioning of the coated surface is essential in order to obtain perfect fabrication results with PLEXIGLAS® RADIANT.

### **Cleaning**

Clean PLEXIGLAS® RADIANT with a mild soap solution or cleaning agent and lukewarm water. Use a soft, clean cloth and gentle pressure (no rubbing). Make sure not to scratch the coated surface, because scratches cannot be removed by polishing this side of the sheet.

### **Machining**

PLEXIGLAS® RADIANT can be sawn, drilled, milled and edge-machined like standard PLEXIGLAS® according to the recommendations in our Guidelines for Workshop Practice – Machining PLEXIGLAS (Ref. No. 311-1), provided the coated surfaces are positioned at the correct angle to the machining tool. Please make sure that the cutting tools used for sawing, drilling, routing and edge treatment enter the coated surface and exit through the uncoated surface.



# All the Colors of the Rainbow

### Bonding

The adhesives suitable for PLEXIGLAS® are also suitable for PLEXIGLAS® RADIANT. Since PLEXIGLAS® RADIANT is partially transparent, adhesive joints remain almost invisible on the uncoated surface. The uncoated surface of PLEXIGLAS® RADIANT can be easily bonded with standard PLEXIGLAS®, providing comparable final bond strength. However, the final bond strength does differ noticeably when bonds are made with the coated surface. The bond with the coated surface can be improved to a certain extent using cyanoacrylate adhesives. Where high bond strengths are required, we recommend removing the surface coating in the area to be bonded. If polyester tape is used to assist with bonding, please remove the strips of tape carefully after bonding is completed, pulling them off from the surface towards the edge. That avoids delamination of the coating at the edges.

### Linear Heating/Line-Bending

PLEXIGLAS® RADIANT sheets can be bent simply and quickly on standard line-bending machines. For best results, the coated side of the sheet should be on the side exposed to tensile stress (outer side of bend). At small bending radii, please heat the uncoated side of PLEXIGLAS® RADIANT. At large bending radii of more than 90°, it is advisable to heat the coated side.

### Thermoforming/Stretch Forming

You can thermoform PLEXIGLAS® RADIANT to obtain a variety of shapes. If only one side of the sheet is heated, the coated surface should face the heat source. PLEXIGLAS® RADIANT is also suitable for moderate stretch forming using compressed air. In this case, and during thermoforming, the coated surface of the sheet should be on the side exposed to tensile stress (outer side). As with PLEXIGLAS® XT sheets, the recommended forming temperature is between 150 and 160°C.

### Flame Polishing

PLEXIGLAS® RADIANT can be flame-polished under the same conditions as standard acrylic sheets. For best results, flame-polish stacked sheets. The coated surfaces should face inwards, to protect them from the flame. If you would like to flame-polish individual sheets, we recommend placing the PLEXIGLAS® RADIANT sheet with the coated surface on a sheet of standard acrylic for better protection.

### Sales Range

Size	Thickness
2440 mm x 1220 mm	3 mm



## **Important notes**

- *The coated surface is protected by a clear masking film. The uncoated surface has blue masking film.*
- *Scratches cannot be polished off the coated surface. Please make sure not to scratch that surface.*
- *PLEXIGLAS® RADIANT is meant for indoor use. It has only limited resistance to outdoor exposure.*
- *Store the sheets horizontally on a perfectly flat surface. PLEXIGLAS® RADIANT should not be stored vertically, nor stored near heat sources.*

## **Degussa Advanced Polymer Shapes**

### **Röhm GmbH & Co. KG**

Certified to DIN EN ISO 9001 (quality)  
and DIN EN ISO 14001 (environment)

info@plexiglas.net  
www.plexiglas.net  
www.plexiglas-magic.com

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, also with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

® = registered trademark

PLEXIGLAS® is a registered trademark of  
Röhm GmbH & Co. KG, Darmstadt, Germany.

